


STANDARD CITY COMBINED 6" CURB & GUTTER

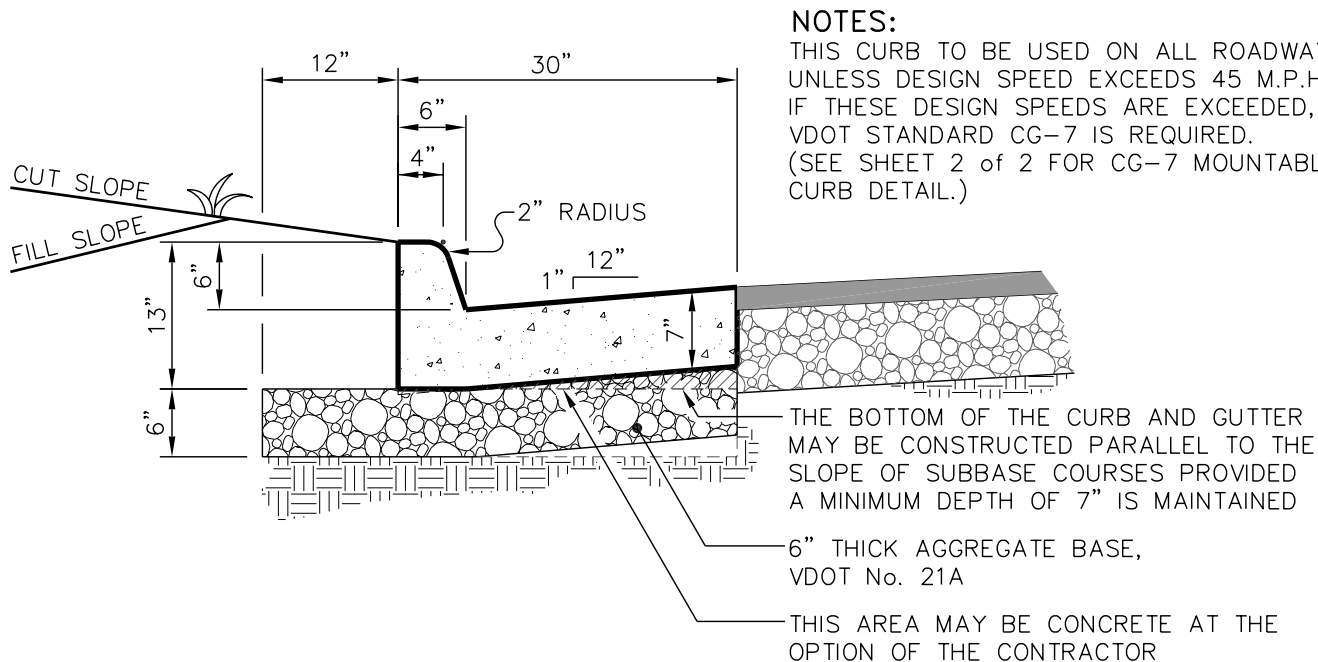

STANDARD VDOT COMBINATION 6" CURB & GUTTER (CG-6)*

* PER 2001 VDOT ROAD AND BRIDGE STANDARDS OR LATEST REVISION

NOTES:

1. SCORE CURB / VALLEY GUTTER AT 10' O.C.
2. PROVIDE 1/2" EXPANSION JOINTS AT 90' O.C.
3. CONCRETE TO BE 3000 P.S.I. @ 28 DAYS, AIR ENTRAINED.
4. THESE NOTES APPLY TO SHEETS 1 THRU 3 OF THIS DETAIL.



THE CITY OF LYNCHBURG

STD. CURB & GUTTER & VALLEY GUTTER DETAIL

USE WITH THE CITY OF LYNCHBURG STANDARD SPECIFICATIONS ONLY

SCALE:
NOT TO SCALE

REVISION DATE:
10-21-04

DETAIL #
25.04

SHEET #:
1 OF 3